

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



Europäisches Patentamt  
European Patent Office  
Office européen d s br vets



(11) Publication number : **0 488 742 A1**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number : **91311033.4**

(51) Int. Cl.<sup>5</sup> : **G03G 9/097**

(22) Date of filing : **28.11.91**

(30) Priority : **28.11.90 JP 328361/90**

(43) Date of publication of application :  
**03.06.92 Bulletin 92/23**

(84) Designated Contracting States :  
**DE ES FR GB IT**

(71) Applicant : **MITA INDUSTRIAL CO., LTD.**  
**2-28, 1-chome, Tamatsukuri Chuo-ku**  
**Osaka 540 (JP)**

(72) Inventor : **Tsubota, Noriaki**  
**10-12, Yashiro Tokouji-cho**  
**Himeji-shi, Hyogo-ken (JP)**

Inventor : **Kubo, Masahiko**  
**B-105, Twin-Plaza Nagaike, 1-21-18, Ike-machi**  
**Yao-shi, Osaka-fu (JP)**

Inventor : **Fuji, Kazuo**  
**830, Shinjo**

**Higashi-osaka-shi, Osaka-fu (JP)**

Inventor : **Watanabe, Akihiro**

**1916, Ohwada, Kawai-cho**

**Kita-katsuragi-gun, Nara-ken (JP)**

Inventor : **Kuramae, Yoshihisa**

**321 Nagao-ryo, 3-5-1, Fujisaka, Higashi-machi**  
**Hirakata-shi, Osaka-fu (JP)**

(74) Representative : **Cresswell, Thomas Anth ny**  
**et al**  
**J.A. Kemp & Co. 14 South Square Gray's Inn**  
**London WC1R 5LX (GB)**

(54) **Electrophotographic toner for negative charging.**

(57) An electrophotographic toner for negative charging comprises a polyester resin as fixing resin and a quaternary ammonium salt having an oxyacid anion as a charge-controlling assistant in combination with a charge-controlling agent for negative charging and a colorant. The quaternary ammonium salt used as the assistant is incompatible with the fixing resin but dispersible therein. The toner provides a sharp distribution of the charge quantity so that formation of highly charged toner particles which do not contribute to development and of lowly charged toner particles which are easily scattered is effectively prevented.

EP 0 488 742 A1

## Background of the Invention

### (1) Field of the Invention

5 The present invention relates to an electrophotographic toner for negative charging. More particularly, the present invention relates to an electrophotographic toner for negative charging, which is capable of forming a high-density image without scattering of the toner.

### (2) Description of the Related Art

10 In commercial electrophotographic reproduction or electrophotographic printing, in order to reduce the amount of ozone generated at the charging step, there is ordinarily adopted a process in which an electrostatic image positively charged is formed, and therefore, a toner for negative charging is widely used as the developing toner for developing this electrostatic image.

15 Recently, development of a laser beam printer or a digital copying machine has advanced, and in this image-forming apparatus, there is adopted an operation of writing a latent image into an organic photosensitive material of the negative charging type by a laser and performing reversal development by a toner for negative charging, and a high quality is also required for the toner negative charging.

20 The developing toner is generally formed by pulverizing a resin composition comprising a fixing resin, a colorant and a charge-controlling agent as indispensable components into an average particle size of 5 to 15  $\mu\text{m}$ . Naturally, a charge-controlling agent exerting a negative charge-controlling action at the frictional charging is used in case of a toner for negative charging.

25 In the conventional toner charge-controlling process, the average value of the charge quantity as the entire toner is controlled according to the kind of the charge-controlling agent or the amount added of the charge-controlling agent. However, even if the average value of the charge quantity as the entire toner can be controlled, it is very difficult to strictly control the distribution of the charge quantity in toner particles.

30 It is known that a plurality of charge-controlling agents having charging performances reverse to each other are incorporated in toner particles. For example, Japanese Unexamined Patent Publication No. 54-34243 discloses a developer for developing an electrostatically charged image, comprising a toner and a carrier, in which the toner is a toner for negative charging, which comprises a dye positively charged by friction with the carrier.

35 Furthermore, Japanese Unexamined Patent Publication No. 57-196264 discloses an electrically insulating magnetic one-component developer comprising an electrically insulating fixing medium and, dispersed in the fixing medium, a magnetic material powder and a charge-controlling agent, in which the charge-controlling agent comprises a negative or positive charge-controlling agent and a charge-controlling agent having a reverse polarity at a weight ratio of from 1/0.05 to 1/1.5.

40 In the conventional toner for negative charging, even though the average value of the charge quantity can be maintained at a satisfactory level by adjusting the kind or amount added of the charge-controlling agent, a disadvantage of considerable broadening of the distribution of the charge quantity cannot be eliminated. Namely, a highly charged toner having a much larger charge quantity than the average value, which is not consumed for the development, is inevitably generated at a certain frequency (distribution quantity). Furthermore, a lowly charged toner having a much smaller charge quantity than the average value and causing scattering of the toner is generated at a certain frequency.

45 Particles of the former highly charged toner are electrically strongly attracted to surfaces of the carrier particles and are present in a hardly separable state, and they extraordinarily inhibit frictional chargeability performances of the carrier particles. Accordingly, even in case of a toner causing no particular problem at the initial stage of the development, with the lapse of the developing time, the proportion of the uncharged or lowly charged toner increases, and such troubles as scattering of the toner, fogging and reduction of the image density are caused.

50 In the above-mentioned prior art process in which a charge-controlling agent for negative charging is combined with a positively chargeable dye (charge-controlling agent), there can be attained an advantage that the distribution of the charge quantity can be considerably freely shifted to the high charge quantity side or the low charge quantity side, but this process is still insufficient for sharpening the distribution of the charge quantity of the toner and controlling formation of a highly charged toner or a lowly charged toner completely or to a level that can be neglected.

### Summary of the Invention

55 It is a primary object of the present invention to overcome the above-mentioned defects of the conventional

toner for negative charging and provide a toner for negative charging, in which the charge quantity of the toner can be preferably adjusted, the average value of the charge quantity of the toner is arranged within a range optimum for prevention of scattering of the toner and reduction of the image density, the distribution of the charge quantity of the toner is sharp, and there are hardly present a highly charged toner not used for the development and a lowly charged toner causing scattering of the toner.

Another object of the present invention is to provide a toner for negative charging, in which the distribution of the charge quantity of the toner is sharp, rise of the charge is quick at the time of charging, and at the long-time operation the charging characteristics are hardly degraded.

In accordance with the present invention, there is provided an electrophotographic toner for negative charging, comprising a fixing resin, a colorant, a charge-controlling agent for negative charging, and a charge-controlling assistant, wherein the fixing resin is a polyester resin, and the charge-controlling assistant is a positive charge-controlling substance which is incompatible with the fixing resin and has a dispersibility in the fixing resin.

As the positive charge-controlling substance used as the charge-controlling assistant in the present invention, there are preferably used quaternary ammonium salts, especially quaternary ammonium salts containing an oxyacid anion as the anion.

It is preferred that the charge-controlling agent (A) and the charge-controlling assistant (B) be present at an (A)/(B) weight ratio of from 1/0.05 to 1/1, especially from 1/0.1 to 1/0.7, and it also is preferred that the charge-controlling agent and charge-controlling assistant be used in a total amount of 0.5 to 5 parts by weight, especially 2 to 4 parts by weight, per 100 parts by weight of the fixing resin.

#### Brief Description of the Drawings

Fig. 1 is a diagram illustrating the distribution of the charge quantity of the toner of the present invention (Example 1).

Fig. 2 is a diagram illustrating the distribution of the charge quantity of the toner for negative charging (Comparative Example 1), in which the positive charge-controlling substance is not incorporated.

Fig. 3 is a diagram illustrating the distribution of the charge quantity of a toner in which a charge-controlling agent for negative charging and a positively chargeable dye compatible with a fixing resin are incorporated in combination.

Fig. 4 is a diagram illustrating an apparatus for measuring the charge quantity of the toner.

Fig. 5 is a diagram illustrating the distribution (curve A) of the initial charge quantity and the distribution (curve B) of the charge quantity after formation of 10,000 copies, and the distribution (curve C) of the charge quantity after formation of 20,000 copies, observed with respect to the toner of Example 3.

Fig. 6 is a diagram illustrating the distribution (curve A) of the initial charge quantity, the distribution (curve B) of the charge quantity after formation of 10,000 copies, and the distribution (curve C) of the charge quantity after formation of 20,000 copies, observed with respect to the toner of Example 5.

Fig. 7 is a diagram illustrating the distribution (curve A) of the initial charge quantity, the distribution (curve B) of the charge quantity after formation of 10,000 copies, and the distribution (curve C) of the charge quantity after formation of 20,000 copies, observed with respect to the toner of Example 7.

#### Detailed Description of the Invention

The present invention is based on the finding that if a positive charge-controlling substance incompatible with a fixing resin but dispersible therein is combined as the charge-controlling assistant with a charge-controlling agent for negative charging, instead of a positively chargeable dye compatible with the fixing resin, conventionally used, the distribution of the charge quantity can be made conspicuously sharper than in the conventional toner, with the result that generation of a highly charged toner not used for the development or a lowly charged toner causing scattering of the toner can be effectively controlled.

In the present invention, it is also important to use a polyester resin as a fixing resin. This polyester resin has sufficient triboelectric charged amount (negatively electric amount), and since there are many polycarboxylic acids and many polyhydric alcohols which can be used as an esterification agent, the characteristics of the resin can be freely controlled. Hence, a charge-control agent which is non-compatible in the polyester resin and dispersible therein is easy to obtain, and the advantages of the invention may be obtained.

These effects of the present invention can be readily understood from Figs. 1 through 3 showing the distributions of charge quantities of toners.

The distributions of charge quantities shown in Figs. 1 through 3 are determined by using a charge quantity-measuring apparatus shown in Fig. 4 according to the following method.

## Measurement of Distribution of Charge Quantity

The charge quantity-measuring apparatus shown in Fig. 4 comprises a separating portion 2 arranged in a cylindrical housing 1 to separate a toner from a developer, a measuring portion 3 for measuring the distribution of the charge quantity of the separated toner, and a sucking device 11 such as an air pump.

The separating portion 2 is separated from the measuring portion 3 by a partition plate 7. A circulating hole 1a for introducing air into the housing 1 is formed on the side wall of the housing 1 slightly below the partition plate 7. An air-rectifying filter 8 is arranged slightly below the circulating hole 1a.

In the separating portion 2, compressed air is blown by an air needle 5 to a developer maintained on a magnet 4, whereby only the light toner is blown up and scattered while leaving a carrier attracted magnetically to the magnet 4.

A funnel 6 supported by the partition plate 7 is arranged between the separating portion 2 and the measuring portion 3. A receiving opening 6d on the top end of the funnel 6 projects above the partition plate 7, and a dent 6a on the lower end pierces through the filter 8 and is exposed to the side of the measuring portion 3.

In the measuring portion 3, by applying a direct current power R to a pair of electrode rods 9a and 9b embedded in the side wall of the housing 1, a horizontal parallel electric field is formed between the electrode rods 9a and 9b. Reference numeral 10 represents a filter.

The sucking device 11 forms a main air current flowing from the outside of the housing 1 to the measuring portion 3 through the circulating hole 1a and the rectifying filter 8 and also forms an air current for sucking the toner into the funnel 6 above the funnel 6.

In the above-mentioned charge quantity-measuring apparatus, the toner particles separated by the separating portion 2, collected by the funnel 6 and introduced into the measuring portion are vertically dropped while being carried by the air current formed by the sucking device 11 and are allowed to fall on the filter 10 through between the electrode rods 9a and 9b. Since the toner particles fall down in the horizontal parallel electric field between the electrode rods 9a and 9b under Coulomb force H corresponding to the charge quantity in the horizontal direction and gravity V in the vertical direction. Accordingly, the toner particles are dispersed on the filter 10 at a position corresponding to the mass or charge quantity thereof. Then, from the distribution of falling positions of the toner particles, the distribution of the charge quantity of the toner is calculated by an image treatment.

The charge quantity distributions curves shown in Figs. 1, 2 and 3 are those determined according to the above-mentioned method.

In case of toner A where a controlling agent for negative charging alone is combined with a polyester resin (toner of Comparative Example 1), as shown in Fig. 2, most of the toner is charged negatively, but a highly charged toner in area a is present in a large quantity, and a reversely charged toner or an uncharged toner in zone d is contained in a considerable proportion. In case of toner B of the prior art where a positively chargeable dye and a controlling agent for negative charging are combined with a polyester resin (toner of Comparative Example 2), as shown in Fig. 3, the average value of the charge quantity can be shifted to a low charge quantity side but the distribution width is not substantially changed from that of toner A, the amount of the highly charged toner is reduced but the highly charged toner is still present, and the proportion of the reversely charged toner or uncharged toner in area d increases. In contrast, in case of toner C of the present invention where a controlling agent for negative charging is combined with a positive charge-controlling assistant in compatible with a polyester resin (toner of Example 1), the quantity of the toner present in appropriate charging areas b and c increases and the width of the distribution of the charge quantity is drastically narrowed, and the quantity of the highly charged toner in area a or the reversely charged or uncharged toner in area d is reduced (is not present in this case).

By using the foregoing toners A, B and C, copying for obtaining 1,000 prints is continuously carried out in a remodelled machine (the developing process is changed to the reversal developing process) of Laser Beam Printer LPX-1 (supplied by Mita Industrial Co.), and the image density (ID), the fog density (FD) of the image and scattering of the toner in the periphery of the developing device are examined. The obtained results are shown in Table 1.

Table 1

	Toner	Image Density	Fog Density (FD)	Toner Scattering
		(ID)	of Image	(FD)
5	A	1.10 - 1.39	0.001 - 0.006	conspicuous
	B	1.20 - 1.42	0.005 - 0.010	very conspicuous
	C	1.29 - 1.24	below 0.001	not observed

10

From Figs. 1 through 3 and Table 1, it is understood that the toner of the present invention has such preferred charging characteristics that variation of the image density, formation of fogging of the image and scattering of the toner can be controlled.

15 In the toner of the present invention, not only at the initial stage of the development, but also when the development is continued for a long time, variation of the image density, occurrence of fogging and scattering of the toner are not caused and a high effect of preventing the deterioration can be attained.

The fact that by using a charge-controlling assistant for positive charging, which is in compatible with the fixing polyester resin, in the toner of the present invention, the distribution of the charge quantity can be sharpened was found as a phenomenon as the result of many experiments. The reason has not been elucidated, but since a positively chargeable dye compatible with the fixing polyester resin has no effect of sharpening the distribution, it is estimated that the dispersion structure in which in a matrix having the controlling agent for negative charging dissolved or dispersed therein, the positively chargeable substance is dispersed in a larger macro particle size will exert a function of reducing numbers of the highly charged toner and the negatively charged toner. In general, one of serious defects of the combination of the positive charge-controlling substance as the assistant with the negative charge-controlling agent is that when a developer comprising this toner and a carrier is stirred in the developing device, rising of the charge is delayed, even though the charge of the toner particles is finally controlled to a negative value. In contrast, in the toner having the composition and dispersion structure specified in the present invention, when the developer is stirred to initiate stirring, rising of the charge is as quick as in case of the negatively chargeable toner comprising a negative charge-controlling agent alone. This is another advantage attained by the present invention.

30 The negatively chargeable toner of the present invention can be effectively used not only as a toner for forming an ordinary single-color image but also as a toner for forming a so-called full-color image. For example, a full-color image can be formed by lapping a cyan toner, a yellow toner and a magenta toner, but it sometimes happens that the charging characteristics of the respective color toners are changed by a mechanical impact force or heat generated by the stirring operation in the developing device. More specifically, even if the distribution of the charge quantity of each color toner is sharp, it is difficult to maintain this state while continuing the copying operation. Furthermore, if the charging characteristics of each color toner are changed, development of the color toner is not effectively attained, and a desired full-color image can hardly be reproduced. According to the present invention, a sharp distribution of the charge quantity can be effectively maintained over a long period, and the above problem in formation of a full-color image can be effectively eliminated.


40

#### Charge-Controlling Assistant

45 The positive charge-controlling substance used as the charge-controlling assistant in the present invention is incompatible with the fixing resin but dispersible therein and has a charge-controlling action of a polarity reverse to that of the charge-controlling agent for negative charging. More specifically, a quaternary ammonium salt is used.

As the quaternary ammonium salt, there is preferably used a compound represented by the following formula:

50



55


wherein at least one of groups R represents a long-chain alkyl or long-chain alkenyl group having at least 8 carbon atoms, especially 8 to 22 carbon atoms, other groups R represent a lower alkyl group, a benzyl group, a long chain alkyl group of a long-chain alkyl group, with the proviso that at least 2 of these groups R represent

a lower alkyl group having up to 4 carbon atoms or a benzyl group, and A represents an anion, preferably an oxyacid anion.

As the oxyacid anion, there can be mentioned anions of oxyacids such as orthophosphoric acid and pyrophosphoric acid, molybdic acid, tungstic acid, antimoninic acid and bismuthic acid. These quaternary ammonium salts are specially suitable for sharpening the distribution of the charge quantity without delaying rising of charging of the toner.

#### Charge-Controlling Agent

As the negative charge-controlling agent to be used in combination with the above-mentioned charge-controlling assistant, known negative charge-controlling agents can optionally be used, so far as coloration of the colorant and manifestation of the color hue are not inhibited. Specifically, there can be mentioned 1:1 type and 2:1 type metal complex dyes and metal salts of naphthenic acid, especially, metal complex salt dyes represented by the following formula:

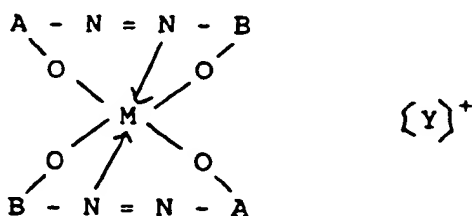

wherein A and B represent residues of diazo and coupling components having a phenolic hydroxyl group at the ortho-position, respectively, M represents a chromium, iron or cobalt metal, and [Y] represents an organic or inorganic cation.

As typical examples, there can be mentioned:

A chromium-containing dye of C.I. Acid Black 123;

C.I. Solvent Black 22;

C.I. Solvent Black 23;

C.I. Solvent Black 28;

C.I. Solvent Black 42; and

C.I. Solvent Black 43.

Furthermore, metal-containing monoazo dyes and metal complex compounds of aromatic dicarboxylic acids are preferably used. These negative charge-controlling agents are suitably used for full-color development.


In the present invention, the charge-controlling agent and the charge-controlling assistant are preferably used at a weight ratio of from 1/0.005 to 1/1, especially from 1/0.1 to 1/0.7. It is preferred that the combination of the charge-controlling agent and charge-controlling assistant be present in an amount of 1 to 5 parts by weight, especially 2 to 4 parts by weight, per 100 parts by weight of the fixing resin.

#### Fixing Resin

In the present invention it is important to use the above-mentioned polyester resin as a fixing resin.

A polyester resin having no compatibility in the charge-controlling agent but showing dispersibility therein may be used.

Generally, it may be obtained preferably as a polyester resin obtained by polycondensing a diol component



wherein R is an ethylene group or propylene group,

and m, n is a positive integer,

with a polycarboxylic acid or acid anhydride as an acid component or its derivative.

Examples of the diol component include polyoxypropylene-2,2-bis(4-hydroxyphenyl)propane, polyoxyethylene-2,2-bis(4-hydroxyphenyl)propane, and polyoxypropylene-polyoxyethylene-2,2-bis(4-hydroxyphenyl)propane.

Examples of the carboxylic acid are maleic acid, fumaric acid, mesaconic acid, citraconic acid, itaconic acid, glutaric acid, phthalic acid, isophthalic acid, terephthalic acid, cyclohexanedicarboxylic acid, succinic acid, adipic acid, sebacic acid, malonic acid, linoleic acid, 1,2,4-benzenetricarboxylic acid, 1,2,5-benzenetricarboxylic acid, 1,2,4-cyclohexanetricarboxylic acid, 2,5,7-naphthalenetricarboxylic acid, 1,2,4-naphthalenetricarboxylic acid, 1,2,5-hexanetricarboxylic acid, 1,2,4-butanetricarboxylic acid, 1,3-dicarboxy-2-methylcarboxypropene, 1,3-dicarboxy-2-methyl-2-methylcarboxypropanetetra(methylene carboxy)methane, 1,2,7,8-octatetracarboxylic acid, enball trimer and anhydrides of these.

This polyester resin may be produced by polycondensing the diol component with the polycarboxylic acid component. In the reaction, other diol components such as ethylene glycol and bisphenol A may be concurrently used in addition to 10 mole% of etherified bisphenols of the above formula.

## 15 Colorant

As the colorant to be incorporated into the binder resin, there can be used at least one member selected from the group consisting of inorganic and organic pigments and dyes, for example, carbon blacks such as furnace black and channel black, iron blacks such as triiron tetroxide, rutile titanium dioxide, anatase titanium dioxide, Phthalocyanine Blue, Phthalocyanine Green, cadmium yellow, molybdenum orange, Pyrazolone Red and Fast Violet B.

In the case where the toner of the present invention is used as the yellow toner for full-color development, for example, there are preferably used benzidine pigments such as C.I. Pigment Yellow 13 (Benzidine Yellow GR), C.I. Pigment Yellow 14 (Vulcan Fast Yellow G), C.I. Pigment Yellow 17, C.I. Pigment Yellow 55, C.I. Pigment Yellow 12 and C.I. Pigment Yellow 83. In this case, a yellow colorant such as chrome yellow, titanium yellow or quinoline yellow lake can be used in addition to the benzidine pigment according to need.

In the case where the toner of the present invention is used as the magenta toner for full-color development, quinacridone pigments such as C.I. Pigment Red 122 (Quinacridone Magenta), C.I. Pigment Red 192, C.I. Pigment Red 209 and C.I. Pigment Violet 19 (Quinacridone Violet) are preferably used.

In the case where the toner of the present invention is used as the cyan toner for full-color development, copper phthalocyanine pigments such as C.I. Pigment Blue 15 (Phthalocyanine Blue), C.I. Pigment 16 (Heliogen Blue G) and C.I. Pigment Blue 17 (Fast Sky Blue) are preferably used.

The colorant is generally used in an amount of 2 to 15 parts by weight, preferably 3 to 10 parts by weight, per 100 parts by weight of the resin.

## 35 Toner

The particle size of toner particles is such that the volume-based median diameter measured by a Coulter Counter is 5 to 15  $\mu\text{m}$ , especially 7 to 12  $\mu\text{m}$ . The particles can have an indeterminate shape formed by melt-mixing and pulverization or a spherical shape formed by dispersion or suspension polymerization.

The toner of the present invention is combined with a known magnetic carrier and used as a two-component magnetic developer to exert excellent charging characteristics.

As the magnetic carrier, there can be used a ferrite carrier and an iron powder carrier. The carrier can be used in an uncoated state or resin-coated state. In general, a ferrite carrier is preferably used.

As the ferrite, there have been used sintered ferrite particles composed of at least one member selected from the group consisting of zinc iron oxide ( $\text{ZnFe}_2\text{O}_4$ ), Yttrium iron oxide ( $\text{Y}_3\text{Fe}_5\text{O}_{12}$ ), cadmium iron oxide ( $\text{CdFe}_2\text{O}_4$ ), gadolinium iron oxide ( $\text{Gd}_3\text{Fe}_5\text{O}_{12}$ ), copper iron oxide ( $\text{CuFe}_2\text{O}_4$ ), lead iron oxide ( $\text{PbFe}_{12}\text{O}_{19}$ ), nickel iron oxide ( $\text{NiFe}_2\text{O}_4$ ), neodymium iron oxide ( $\text{NdFe}_2\text{O}_7$ ), barium iron oxide ( $\text{BaFe}_{12}\text{O}_{19}$ ), magnesium iron oxide ( $\text{MgFe}_2\text{O}_4$ ), manganese iron oxide ( $\text{MnFe}_2\text{O}_4$ ) and lanthanum iron oxide ( $\text{LaFeO}_3$ ). Especially, soft ferrites containing at least one member, preferably at least two members, selected from the group consisting of Cu, Zn, Mg, Mn and Ni, for example, a copper/zinc/magnesium ferrite, can be used.

As the coating resin for magnetic carriers, there are known an acrylic resin, a styrene resin, a silicone resin, a fluorine resin and an amino-modified resin. A resin that controls indirectly the toner charge to a negative level by controlling the charge of the resin-coated magnetic carrier to a positive level is preferably used. Of course, in the present invention, even if this carrier-coating resin is not present, control of the charge can be accomplished effectively and assuredly.

It is preferred that the saturation magnetization of the carrier be 40 to 75 emu/g, especially 45 to 70 emu/g. A ferrite carrier satisfying the above requirement, especially a ferrite carrier having a spherical shape, is preferred.



erably used. It is preferred that the particle size of the ferrite carrier be 20 to 140  $\mu\text{m}$ , especially 50 to 100  $\mu\text{m}$ .

The mixing ratio of the toner and the magnetic carrier depends on the physical properties of the toner and the magnetic carrier, but it is preferred that the mixing weight ratio be in the range of from 1/99 to 10/90, especially from 2/98 to 5/95.

It also is preferred that the resistivity of the developer as a whole be  $5 \times 10^9$  to  $5 \times 10^{12} \Omega\text{-cm}$ , especially  $5 \times 10^9$  to  $5 \times 10^{11} \Omega\text{-cm}$ .


At the development of an electrostatic image, the above-mentioned toner and magnetic carrier are mixed, a magnetic brush having a predetermined length is formed on a developing sleeve having a magnet roll arranged therein, and the magnetic brush is brought into sliding contact with a photosensitive material having the electrostatic image, or the magnetic brush is brought into close proximity to the electrostatic image-holding photosensitive material in a field to which a vibrating electric field is applied.

### Examples

The present invention will now be described in detail with reference to the following examples that by no means limit the scope of the invention.

#### Example 1

By a twin-screw kneader, 100 parts by weight of a polyester as the fixing resin, 8 parts by weight of carbon black as the colorant, 1.5 parts by weight of low-molecular-weight polypropylene as the offset-preventing agent, 2 parts by weight of a chromium-containing monoazo dye as the charge-controlling agent for negative charging and 0.5 part by weight of a quaternary ammonium salt represented by the following formula:

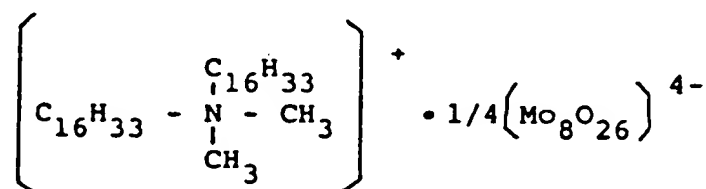


as the charge-controlling assistant incompatible with the polyester resin were melt-kneaded, and the melt-kneaded mixture was cooled, pulverized and sieved to obtain a toner having an average particle size of 11  $\mu\text{m}$ . The toner was mixed and stirred with a resin-coated ferrite carrier having an average particle size of 85  $\mu\text{m}$  at a toner concentration of 4.5% to form a developer. The distribution of the charge quantity was measured by the toner charge quantity-measuring apparatus shown in Fig. 4. The obtained results are shown in Fig. 1.

By using a remodelled machine (the developing process was changed to the reversal developing process) of Laser Beam Printer LPX-1 (supplied by Mita Industrial Co.) having an organic photosensitive material for negative charging mounted thereon (surface potential of photosensitive material: -700 V, developing bias voltage: -500 V), the above-mentioned developer was subjected to the continuous copying test for forming 1,000 prints. Reduction of the image density or occurrence of fogging of the image was not observed, and scattering of the toner was not caused.

The obtained results are shown in Table 1.

#### Example 2

A toner having an average particle size of 11  $\mu\text{m}$  was prepared in the same manner as described in Example 1 except that 0.5 part by weight of a quaternary ammonium salt represented by the following formula:

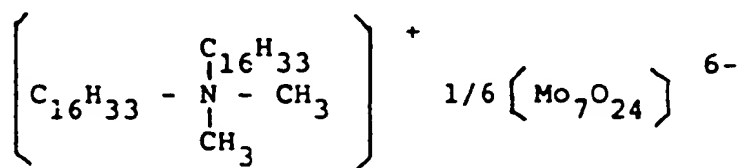

was used as the charge-controlling assistant.

Then, in the same manner as described in Example 1, a developer was formed and 1,000 prints were continuously formed. As in Example 1, a good image was obtained, and scattering of the toner in the machine was not caused. Furthermore, the distribution of the charge quantity of the toner was as sharp as in Example 1.

5

#### Comparative Example 1

A toner was prepared in the same manner as described in Example 1 except that the charge-controlling assistant was not used. The distribution of the charge quantity of the toner was measured in the same manner as described in Example 1. The obtained results are shown in Fig. 2. Furthermore, 1,000 prints were continuously formed in the same manner as described in Example 1. The image density was unstable and dropping of the image density often occurred. Fogging of the image or scattering of the toner was caused.

10

#### Comparative Example 2

15

A toner was prepared in the same manner as described in Example 1 except that 0.5 parts by weight of Solvent Yellow 56, compatible with the fixing polyester resin, was used instead of the charge-controlling assistant used in Example 1. The distribution of the charge quantity of the toner was measured in the same manner as described in Example 1. The obtained results are shown in Fig. 3. Furthermore, 1,000 prints were continuously formed in the same manner as described in Example 1. Fogging of the image and scattering of the toner were conspicuous. The image density was satisfactory to some extent, but the density often became uneven.

20

#### Comparative Example 3

A toner was prepared in the same manner as described in Example 1 except that 0.5 parts by weight of Basic Blue 26, compatible with the fixing resin, was used instead of the charge-controlling assistant used in Example 1. The distribution of the charge quantity of the toner was measured in the same manner as described in Example 1. The obtained results similar to those shown in Fig. 3 were obtained. Furthermore, 1,000 prints were continuously formed in the same manner as described in Example 1. Fogging of the image and scattering of the toner were conspicuous. The image density was satisfactory to some extent, but the density often became uneven.

25

30

#### Comparative Example 4

A toner was prepared in the same way as in Example 1 except that 100 parts by weight of the epoxy resin was used instead of the fixing polyester resin used in Example 1. In the same way as in Example 1, the distribution of the charge quantity of the toner was measured as in Example 1. The distribution was narrower than Figure 2, but the toner in the neighborhood of 0 charge quantity and the high charge quantity toner in the a area were still large.

35

In the same way, 1000 copies were continuously formed. Image fogging toner scattering occurred, and the density of image varied occasionally.

40

#### Example 3

A toner (yellow toner) having an average particle size of 11  $\mu\text{m}$  was prepared in the same manner as described in Example 1 by using 100 parts by a polyester as the fixing resin, 5 parts by weight of C.I. Pigment Yellow 17 as the colorant, 1.5 parts by weight of low-molecular-weight polypropylene as the offset-preventing agent, 2 parts by weight of an aromatic dicarboxylic acid/aluminum complex as the charge-controlling agent for negative charging and 0.5 part by weight of the quaternary ammonium salt used in Example 1.

45

Then, a developer was prepared in the same manner as described in Example 1, and the distribution of the charge quantity was measured by using the apparatus shown in Fig. 4. A sharp distribution shown in curve A in Fig. 5 was observed.

50

Furthermore, in the same manner as described in Example 1, 1,000 prints were continuously formed and the image characteristics were observed. A good image having no scattering of the toner was obtained.

55

Still further, 10,000 prints and 20,000 prints were continuously formed and the distributions of the charge quantity of the toner were measured respectively. The obtained distribution curves (curve B and C in Fig. 5) were as sharp as the curve A of the initial distribution of the charge quantity.

#### Example 4

A toner (yellow toner) was prepared in the same manner as described in Example 3 except that 5 parts by weight of C.I. Pigment Yellow 13 was used as the colorant and 0.5 part by weight of the quaternary ammonium salt used in Example 2 was used as the charge-controlling assistant.

The distribution of the charge quantity was measured in the same manner as described in Example 1. The obtained distribution curve was sharp and similar to the curve A in Fig. 5.

Furthermore, in the same manner as described in Example 3, the image characteristics were observed after 1,000 prints were continuously formed, and the distributions of the charge quantity were measured respectively after 10,000 prints and 20,000 prints were continuously formed. Scattering of the toner was not caused and a good image was obtained, and the distribution of the charge quantity was substantially as sharp as in the initial stage.

#### Comparative Example 4

A toner was prepared in the same manner as described in Example 3 except that 0.5 part by weight of C.I. Solvent Yellow 56 compatible with the fixing resin was used instead of the charge-controlling assistant used in Example 3. The distribution of the charge quantity of the toner was measured in the same manner as described in Example 1. A broad distribution similar to that shown in Fig. 3 was observed.

When 1,000 prints were continuously formed, fogging of the image and scattering of the toner were conspicuous. The image density was satisfactory to some extent, but density unevenness was sometimes caused.

#### Example 5

A toner (magenta toner) was prepared in the same manner as described in Example 3 except that 5 parts by weight of C.I. Pigment Red 122 was used as the colorant. A sharp distribution similar to that shown in the curve A in Fig. 6 was obtained.

In the same manner as described in Example 3, 1,000 prints were continuously formed and the image characteristics were observed. A good image was obtained without scattering of the toner. Then, 10,000 prints and 20,000 prints were continuously formed and the distributions of the charge quantity were measured respectively. As shown by the curves B and C in Fig. 6, the obtained distributions were sharp and were not substantially different from the initial distribution of the charge quantity.

#### Example 6

A toner (magenta toner) was prepared in the same manner as described in Example 4 except that 5 parts by weight of C.I. Pigment Red 122 was used as the colorant. A sharp distribution similar to that shown in the curve A in Fig. 6 was obtained.

In the same manner as described in Example 4, 1,000 prints were continuously formed and the image characteristics were observed. A good image was obtained without scattering of the toner. Then, 10,000 prints and 20,000 prints were continuously formed and the distributions of the charge quantity were measured respectively. The obtained distributions were sharp and were not substantially different from the initial distribution of the charge quantity.

#### Example 7

A toner (cyan toner) was prepared in the same manner as described in Example 3 except that 5 parts by weight of C.I. Pigment Blue 15 was used as the colorant. A sharp distribution similar to that shown in the curve A in Fig. 7 was obtained.

In the same manner as described in Example 3, 1,000 prints were continuously formed and the image characteristics were observed. A good image was obtained without scattering of the toner. Then, 10,000 prints and 20,000 prints were continuously formed and the distributions of the charge quantity were measured respectively. As shown by the curves B and C in Fig. 7, the obtained distributions were sharp and were not substantially different from the initial distribution (curve A) of the charge quantity.

#### Example 8

A toner (cyan toner) was prepared in the same manner as described in Example 4 except that 5 parts by

weight of C.I. Pigment Blue 15 was used as the colorant. A sharp distribution similar to that shown in the curve A in Fig. 7 was obtained.

In the same manner as described in Example 4, 1,000 prints were continuously formed and the image characteristics were observed. A good image was obtained with out scattering of the toner. Then, 10,000 prints were continuously formed and the distribution of the charge quantity was measured. The obtained distribution was sharp and was not substantially different from the initial distribution of the charge quantity.

## Claims

10


1. An electrophotographic toner for negative charging, comprising a colorant, a charge-controlling agent for negative charging, a polyester fixing resin and a charge-controlling assistant which is a positive charge-controlling substance incompatible with the fixing resin and dispersible therein.

15

2. A toner according to claim 1 wherein the charge-controlling assistant is a quaternary ammonium salt.

3. A toner according to claim 2 wherein the charge-controlling assistant is a compound of formula (I)

20

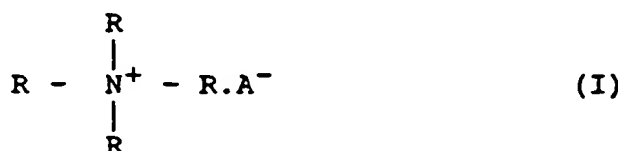

25

wherein one or two of the groups R are alkyl or alkenyl having at least 8 carbon atoms and the other groups R are alkyl of up to 4 carbon atoms or benzyl and A is an anion.

4. A toner according to claim 3 wherein at least one of the groups R is alkyl or alkenyl of 8 to 22 carbon atoms.

30

5. A toner according to any one of claims 2 to 4 wherein the charge-controlling assistant is a quaternary ammonium salt containing an oxyacid anion.

6. A toner according to any one of claims 1 to 5 wherein the charge-controlling agent and the charge-controlling assistant are present at a weight ratio of from 1:0.05 to 1:1, and are used in a total amount of 0.5 to 5 parts by weight per 100 parts by weight of the fixing resin.

35

7. A yellow toner according to any one of claims 1 to 6 wherein the colorant is a benzidine pigment.

8. A magenta toner according to any one of claim 1 to 6 wherein the colorant is a quinacridone pigment.

40

9. A cyan toner according to any one of claims 1 to 6 wherein the colorant is a copper-phthalocyanine pigment.

10. Use of a toner according to any one of claims 1 to 9 in electrophotographic printing and electrophotographic reproduction of images.

45

50

55

FIG. 1


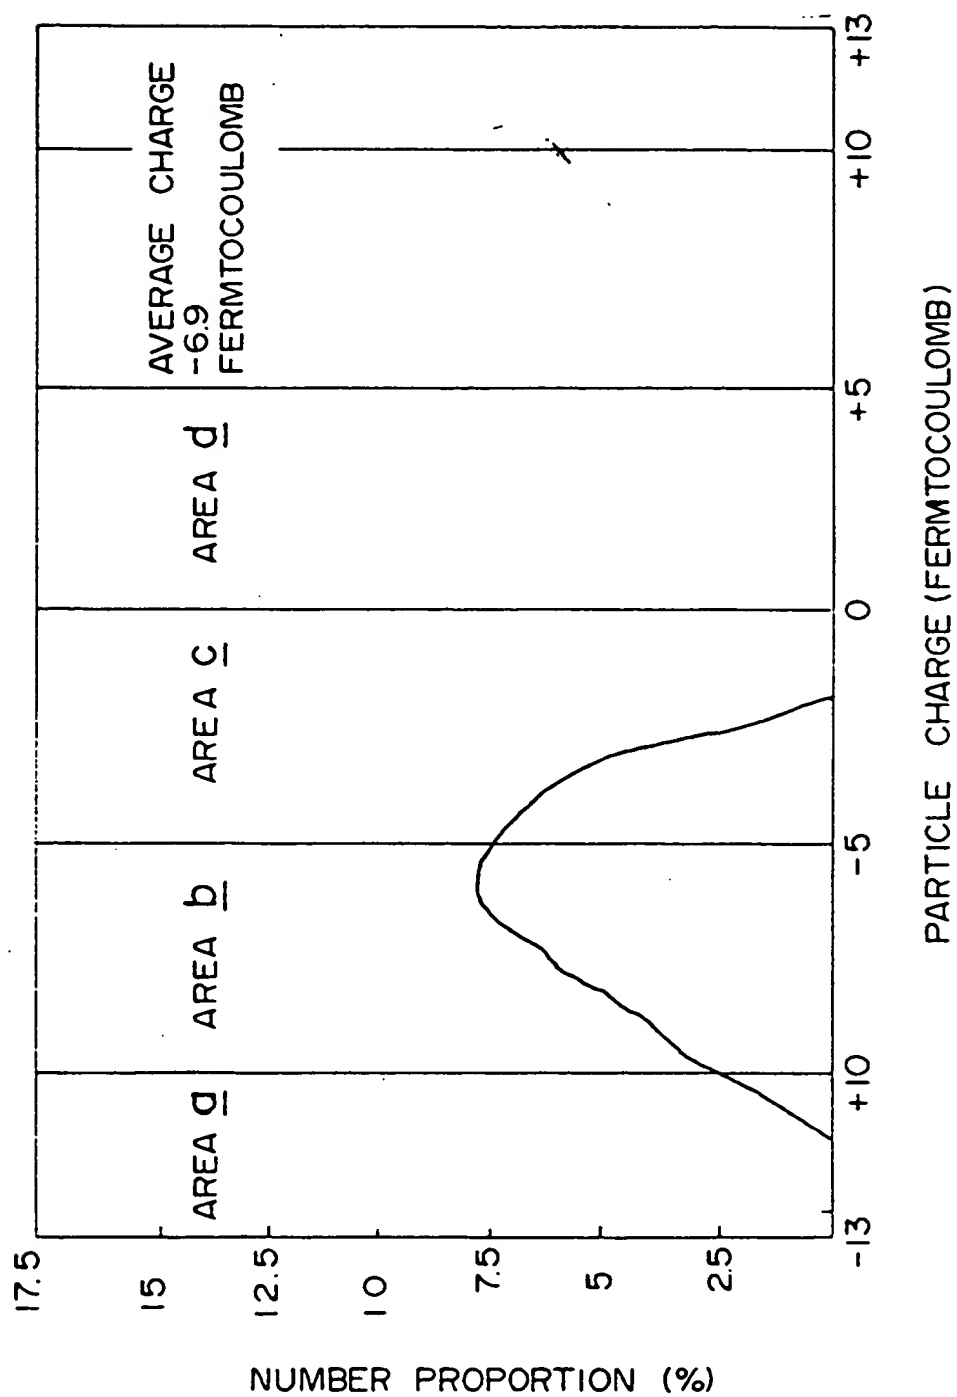


FIG. 2

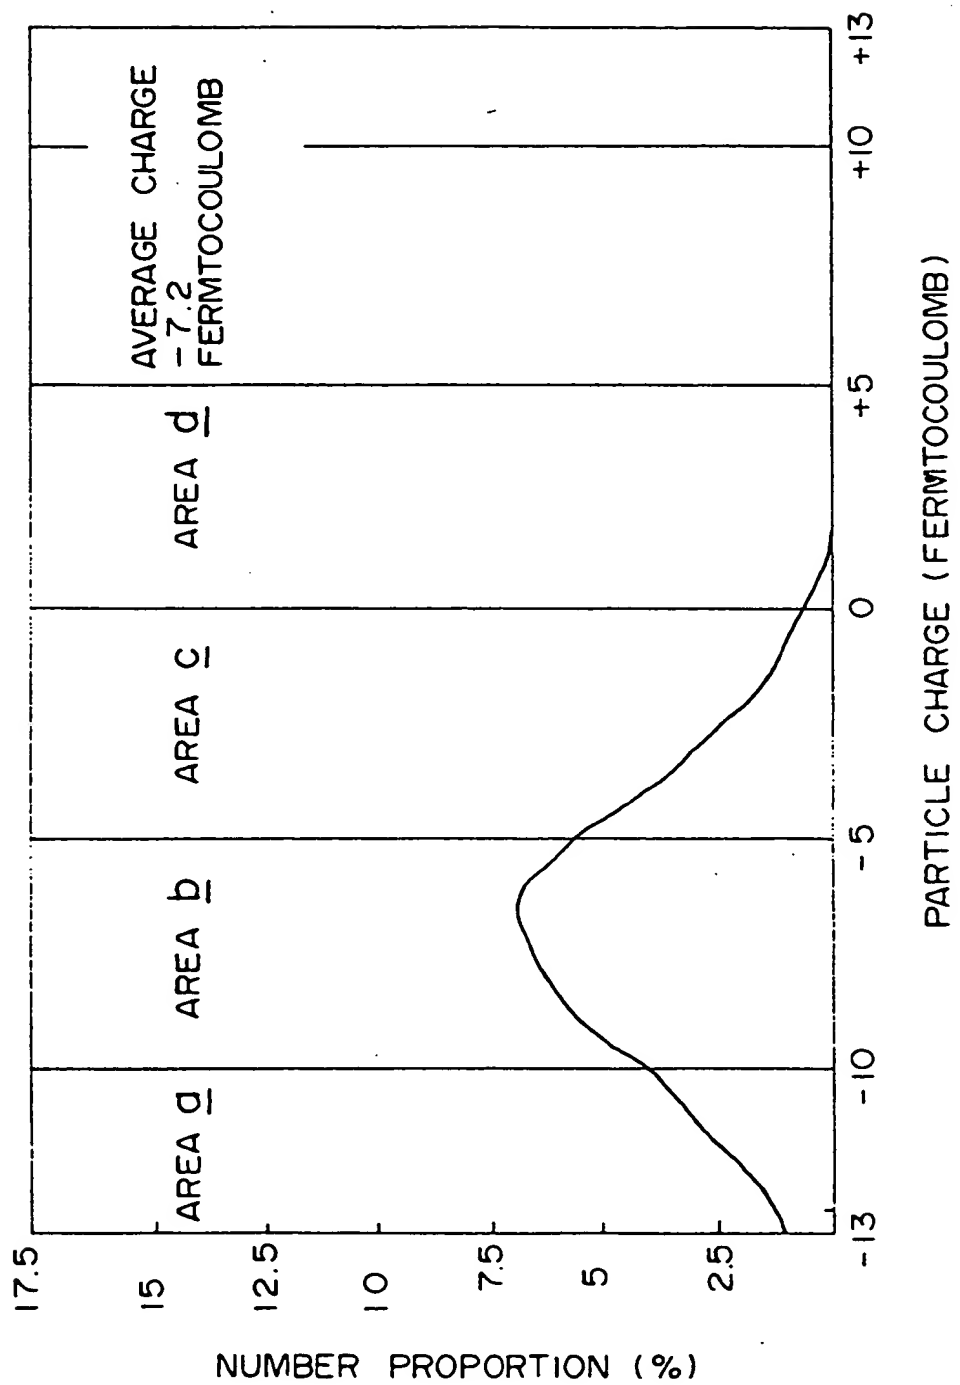

# FIG. 3

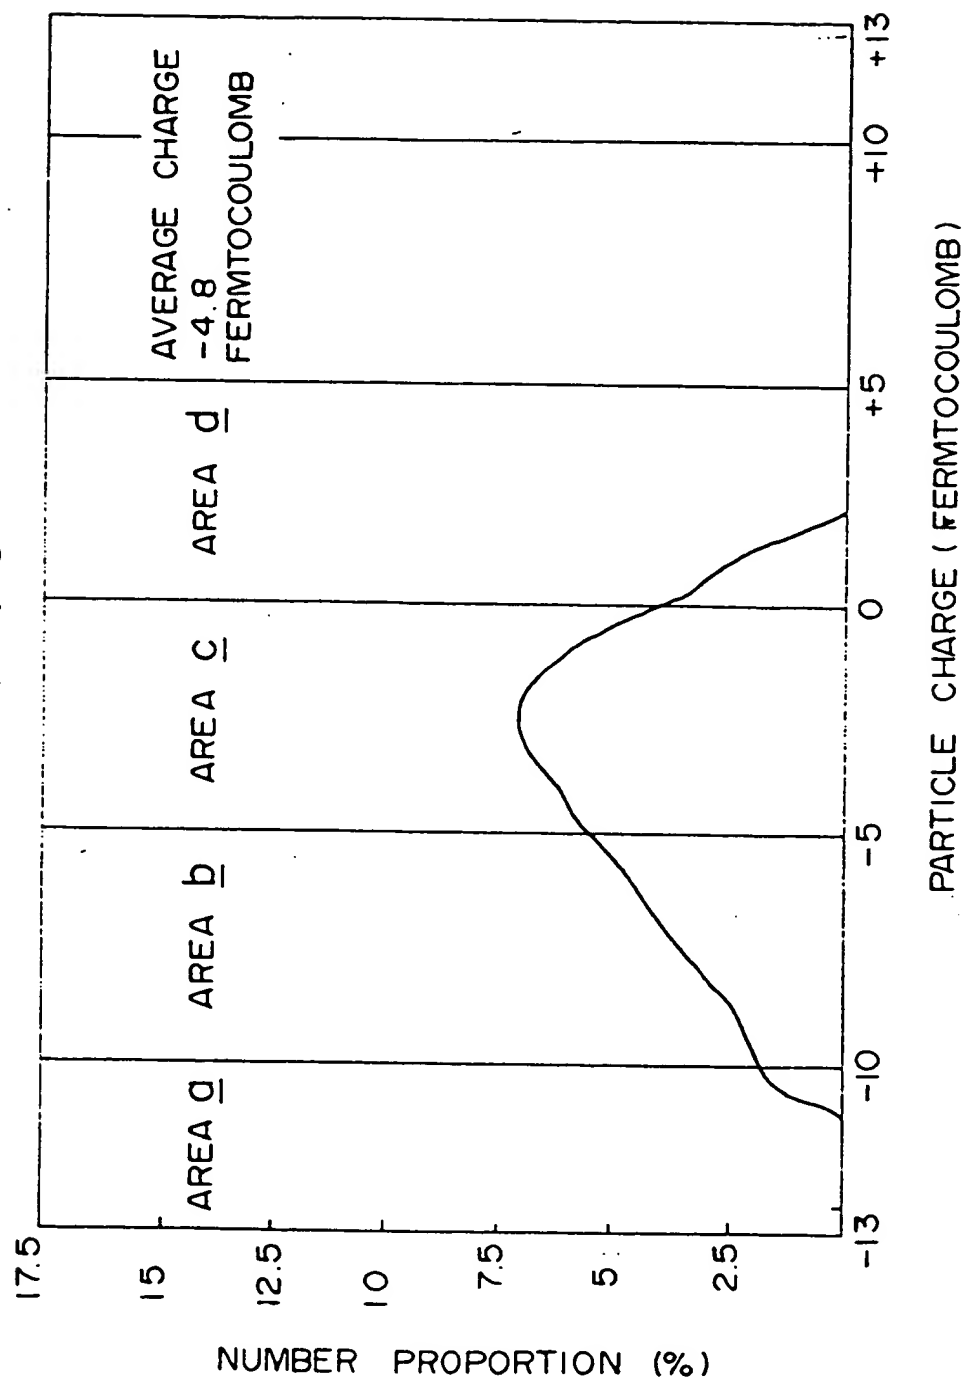


FIG. 4

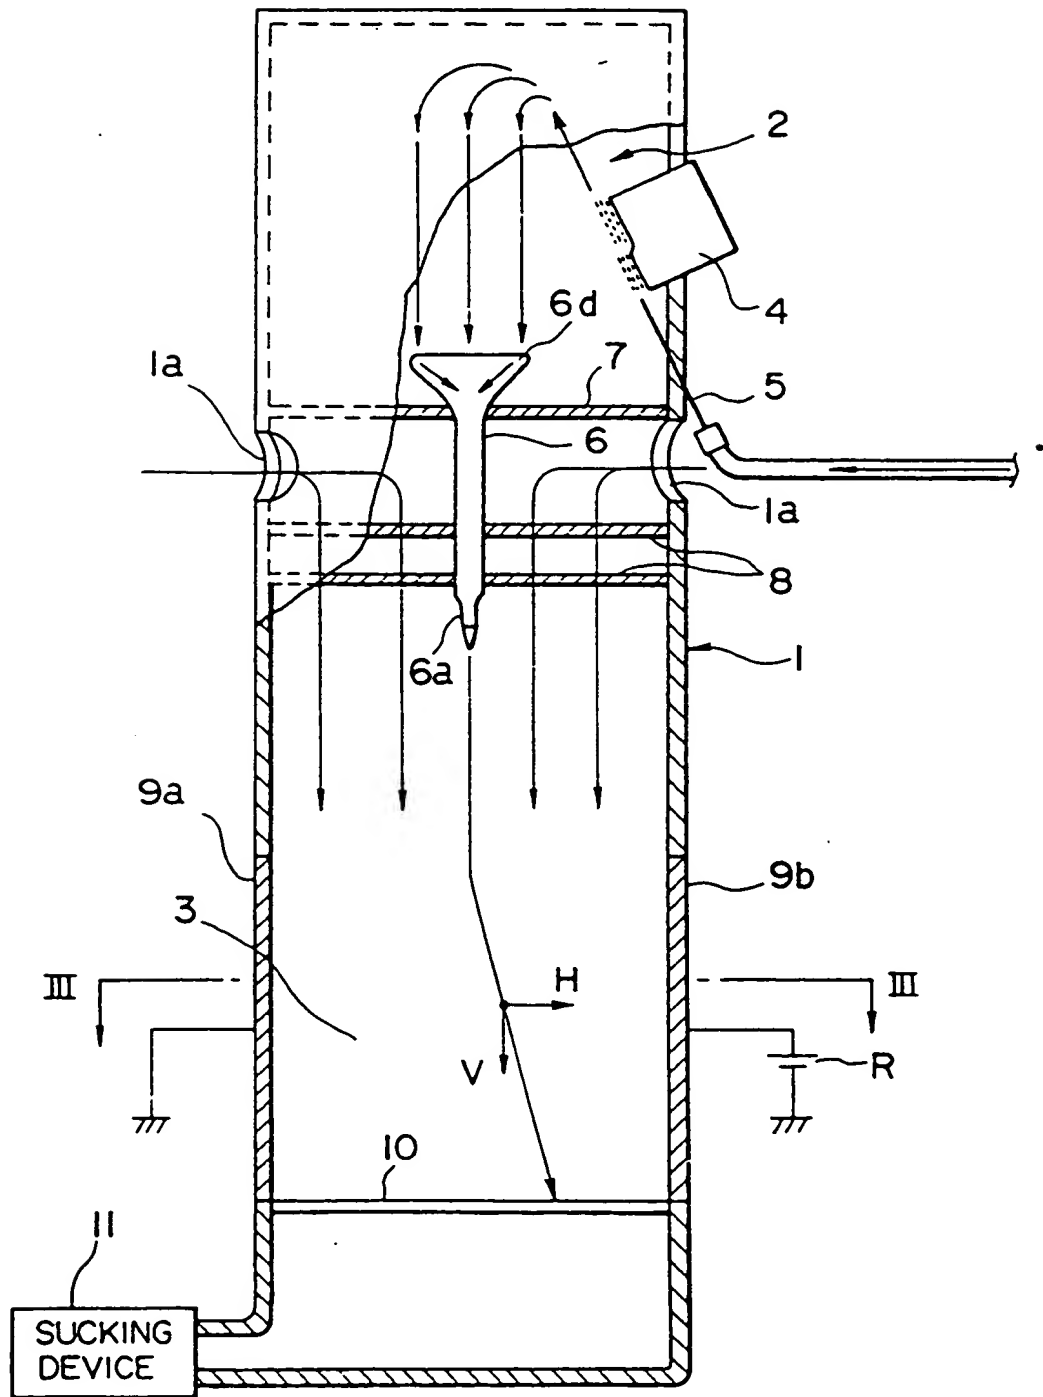




FIG. 5

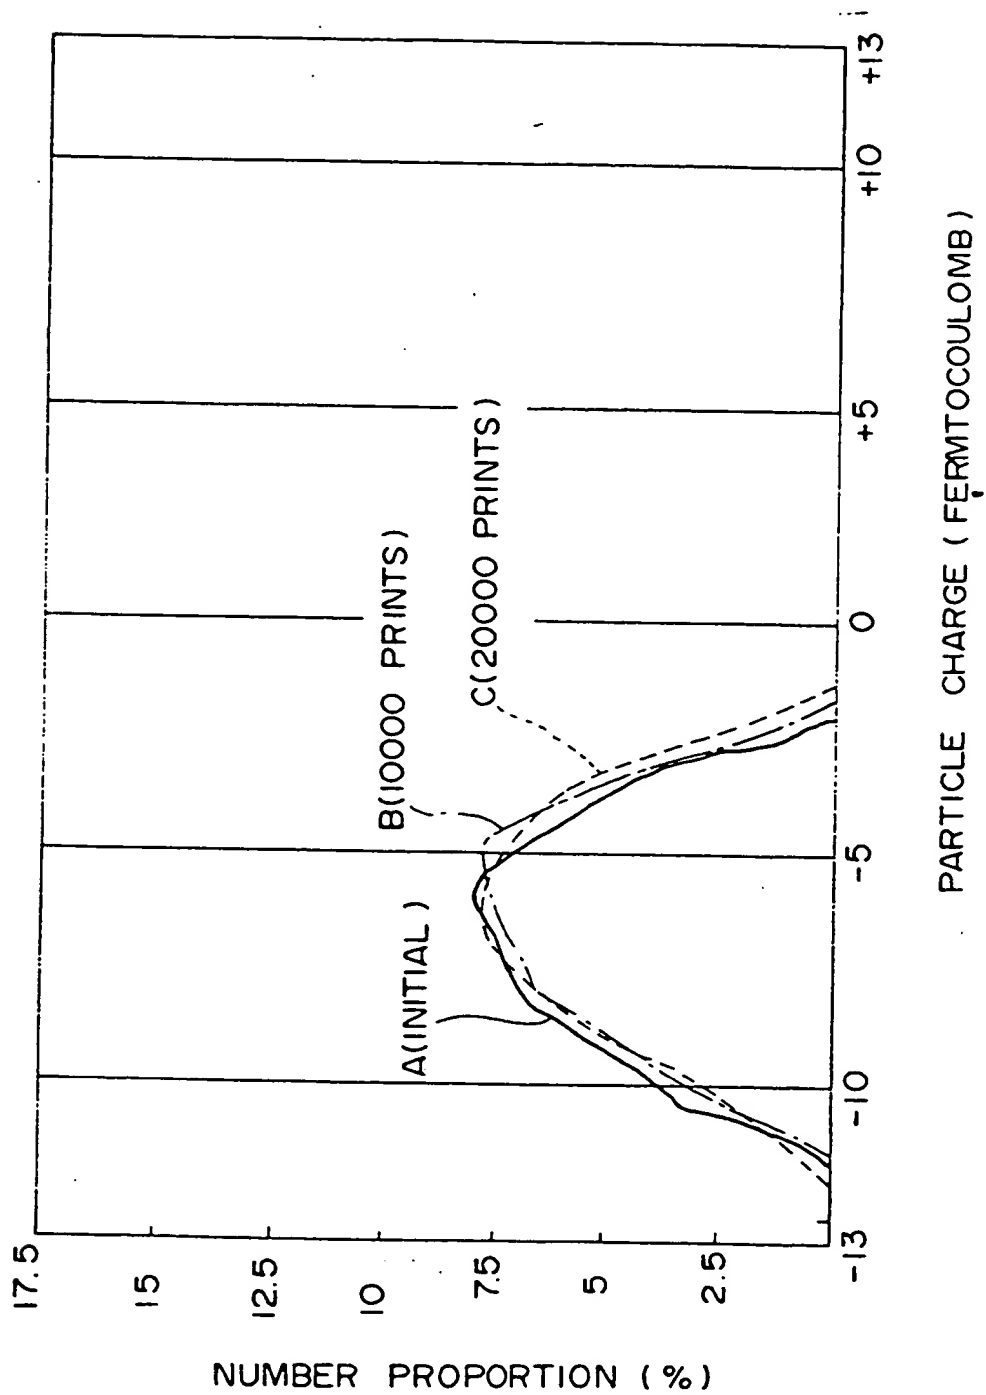


FIG. 6


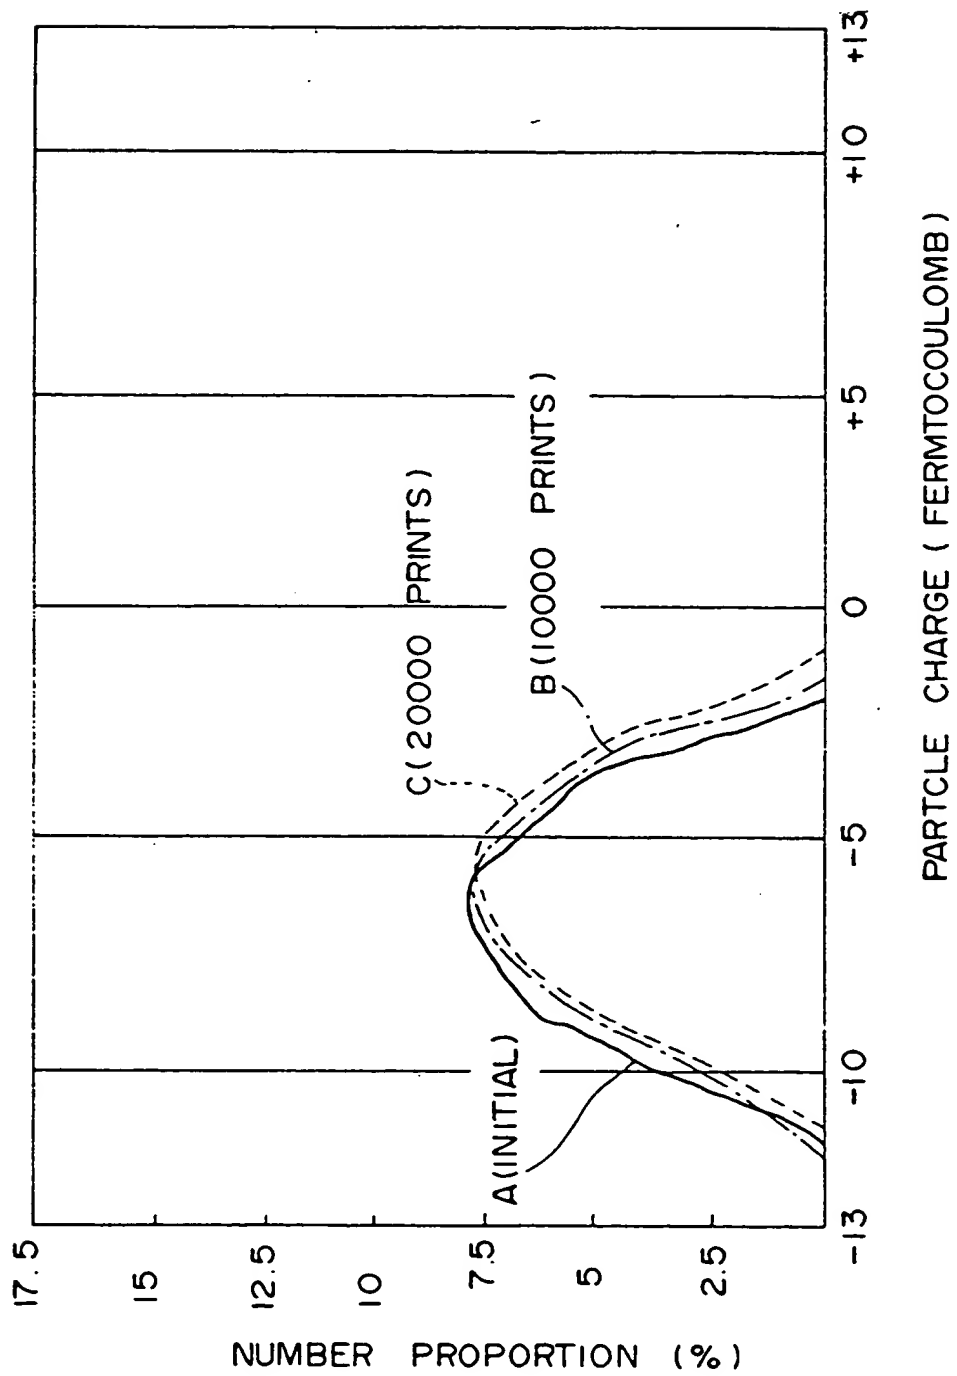


FIG. 7



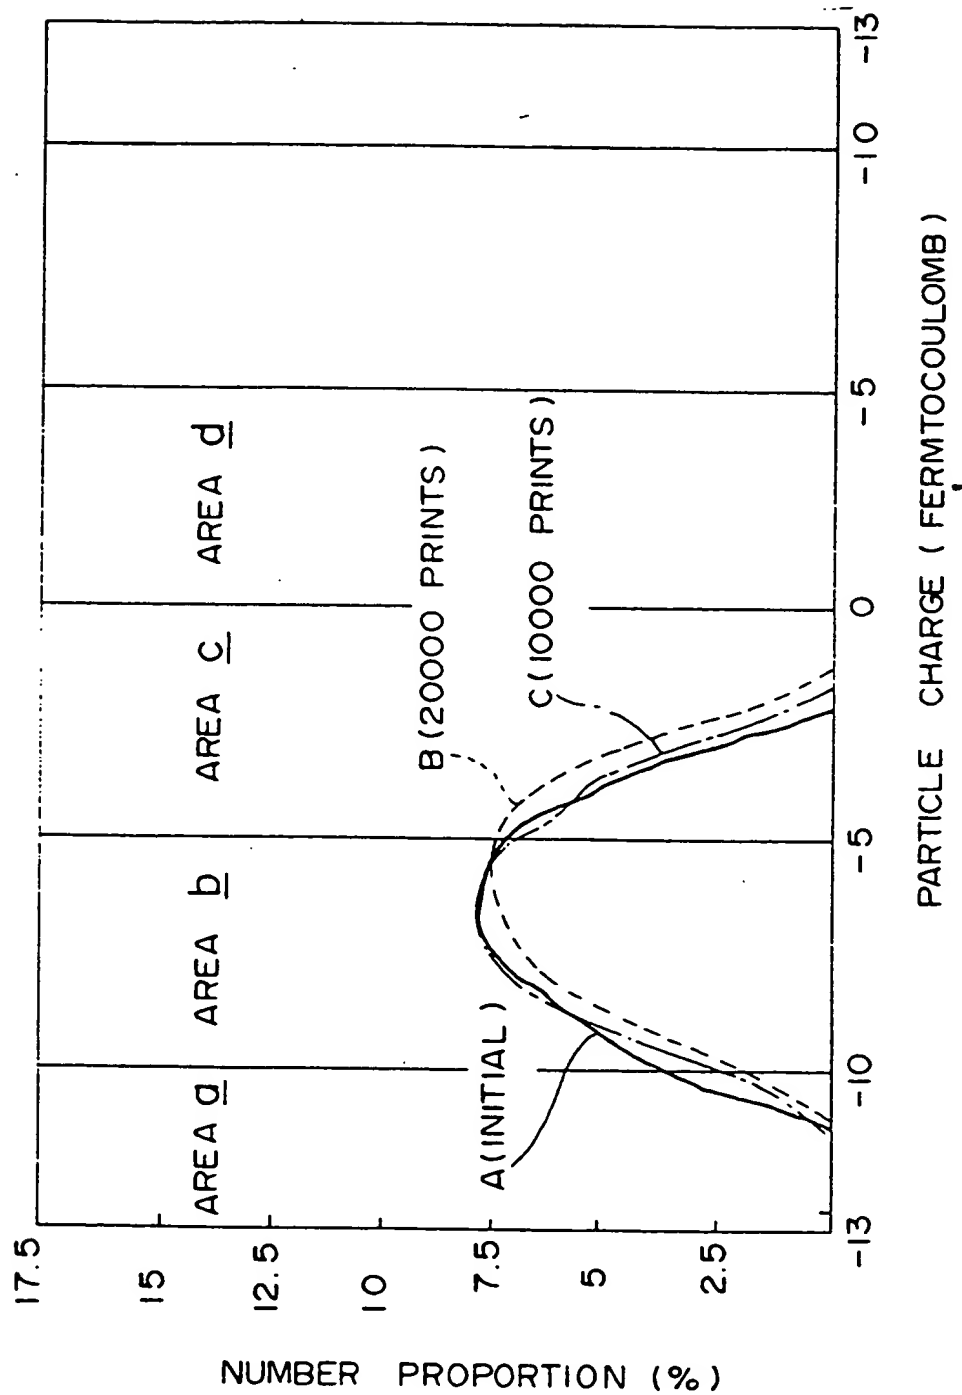

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 91 31 1033

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.5)
X	PATENT ABSTRACTS OF JAPAN vol. 15, no. 23 (P-1155)18 January 1991 ( MITSUBISHI KASEI CORP. ) 29 October 1990 & JP-A-2 264 970	1-3	G03G9/097
Y	---	7-10	
Y	FR-A-2 592 184 (RICOH CO., LTD.) * page 3, line 25 - line 30 * * page 8, line 10 - page 9, line 19; claims 1-3 *	7-10	
Y	---		
Y	EP-A-0 227 874 (ORIENT CHEMICAL INDUSTRIES LTD.) * the whole document *	7-10	
A	---		
A	EP-A-0 284 000 (HODOGAYA CHEMICAL CO., LTD.) * page 4, line 7 - line 30; claim 1 *	1-10	
A	---		
A	PATENT ABSTRACTS OF JAPAN vol. 10, no. 305 (P-507)(2361) 17 October 1986 ( FUJITSU LTD. ) 6 June 1986 & JP-A-61 118 761 * abstract *	1-10	TECHNICAL FIELDS SEARCHED (Int. CL.5)
A	---		
A	PATENT ABSTRACTS OF JAPAN vol. 14, no. 245 (P-1052)(4188) 24 May 1990 ( CANON INC. ) 5 March 1990 & JP-A-264 558 * abstract *	1-10	G03G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 FEBRUARY 1992	Examiner HINDIAS E.
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : technological background O : non-written disclosure P : intermediate document a : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1500 (01.92) (P0101)